


Fast, Compact and Configurable
SATA Recorder XK7 IP

Product Brief
September 15 – Ver. 1.0

LDS SATA
RECORDER IP

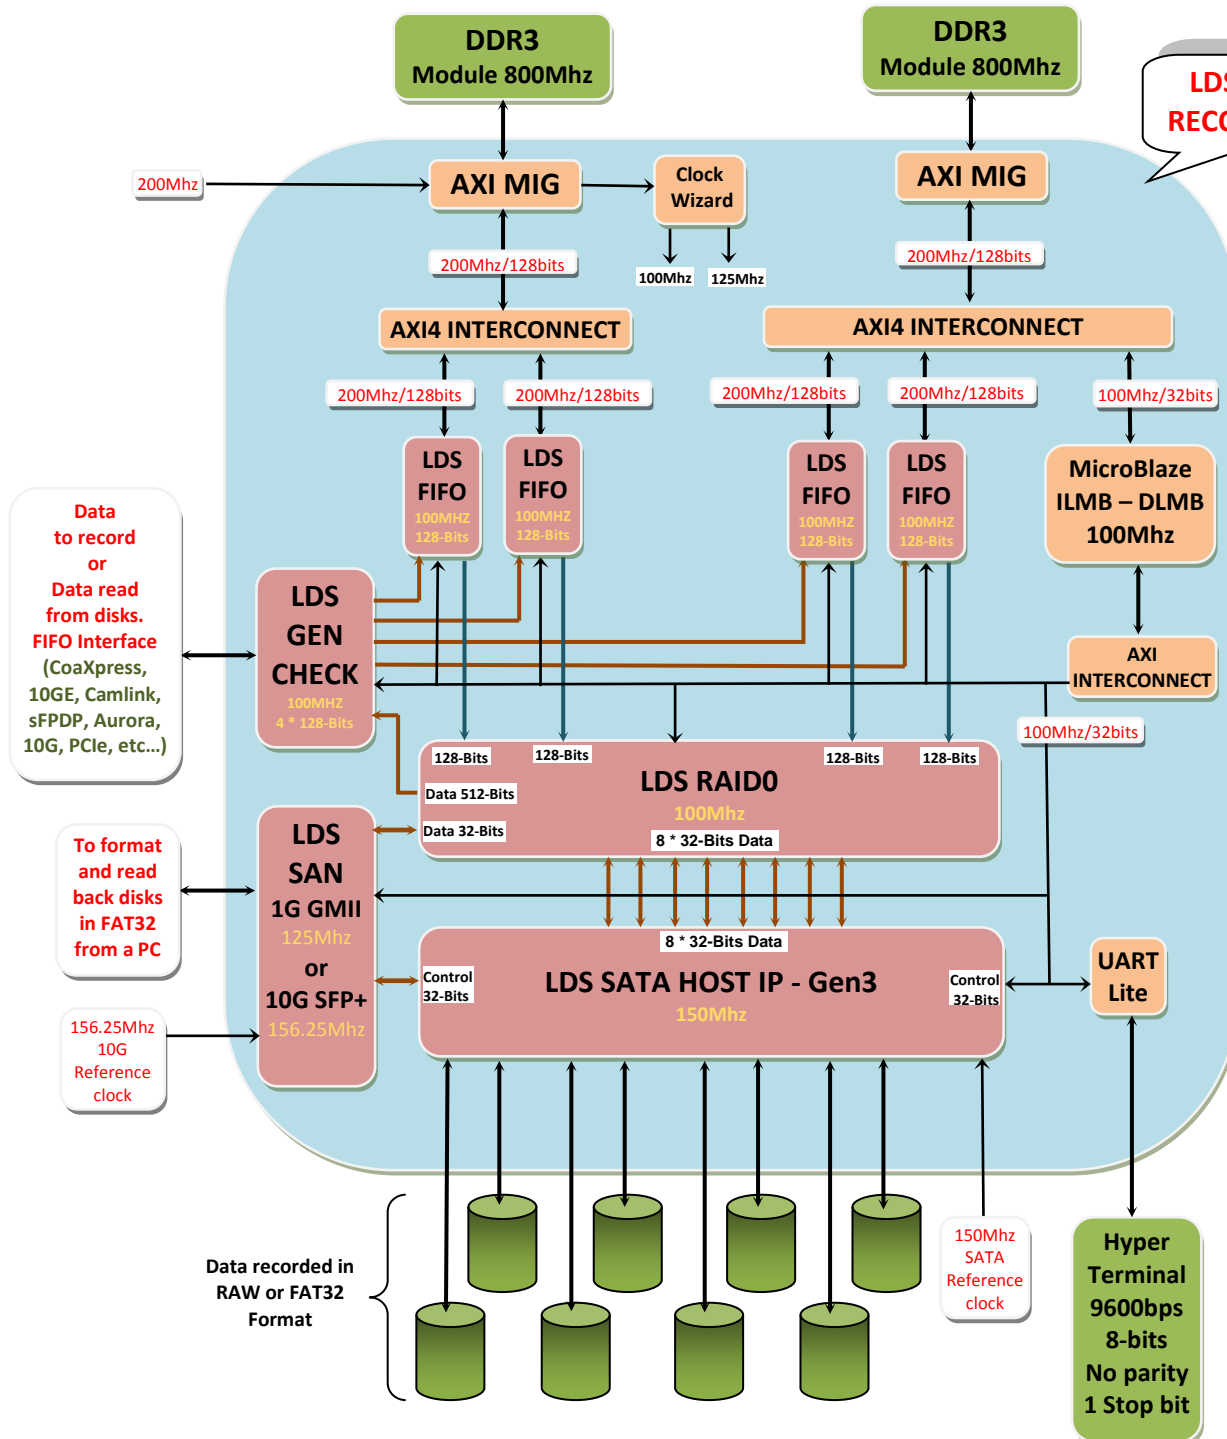

Features

The LDS_SATA_RECORDER_XK7 IP is a complete recorder sub-system IP. It can be configured according to the recording performance required and the quantity of the data to be recorded.

- The data can be recorded in FAT32 or in RAW format. In FAT32 mode, the disks must be already formatted or can be formatted through the Ethernet link and a PC under windows or Linux (free driver).
- The Ethernet link, when used, enables to download FAT32 files into your PC to process them later according to user application (It is not used to record data).
 - o 1Gbits LDS Mac in GMII or 10Gbits Ethernet LDS Mac with XGMII, XAUI or SFP+ interface.
 - o Manages jumbo frame until 9216 bytes
 - o Manages AoE protocol in State Machine
- The 'Generator_Checker' block enables to check any recording error in the data flow. This block generates a counter which is written into disks and then readback and compared in order to detect any recording error. The user data goes through this block with the help of asynchronous internal FIFO.
- A User Interface on a Hyperterminal enables to configure all the recording session (recording size, file size, raid0 strip, number of disk, Directory, etc...) and enables to run a write and read performance test of the system using the 'Generator_Checker' block. It enables you to check the performance of your systems, especially the disks.
- The 150MHz SATA reference clock and the 156.25MHz 10G Ethernet reference clock are generated from the XM104 daughter board after a I2C configuration.

Netlist and VHDL source code format is available for ease of customization. The C source code is always provided. It can be customized by Logic Design Solutions.

Verification

The LDS_SATA_RECORDER_XK7 IP has been validated on a KC705+XM104 Xilinx evaluation board and four SSD.


Design Package

Device Family	Xilinx Kintex 7 T FPGA speed grade : 2
Package file	Netlist or VHDL Source code : Data Sheet, Project Description, C source code and Constraint File.
Design Tool Used	Xilinx VIVADO 2015.2
Support	Support provided by Logic Design Solutions 1 year e-mail and telephone support from Logic Design Solutions included in the IP price. Support does not cover User IP modifications. Maintenance Contracts available.

Demo Package

One bitsream demo is available on a Xilinx KC705 + XM104 Xilinx board in SATA III configuration and 1G Ethernet RG45 or 10G Ethernet SFP+.

The demo configuration is the following:

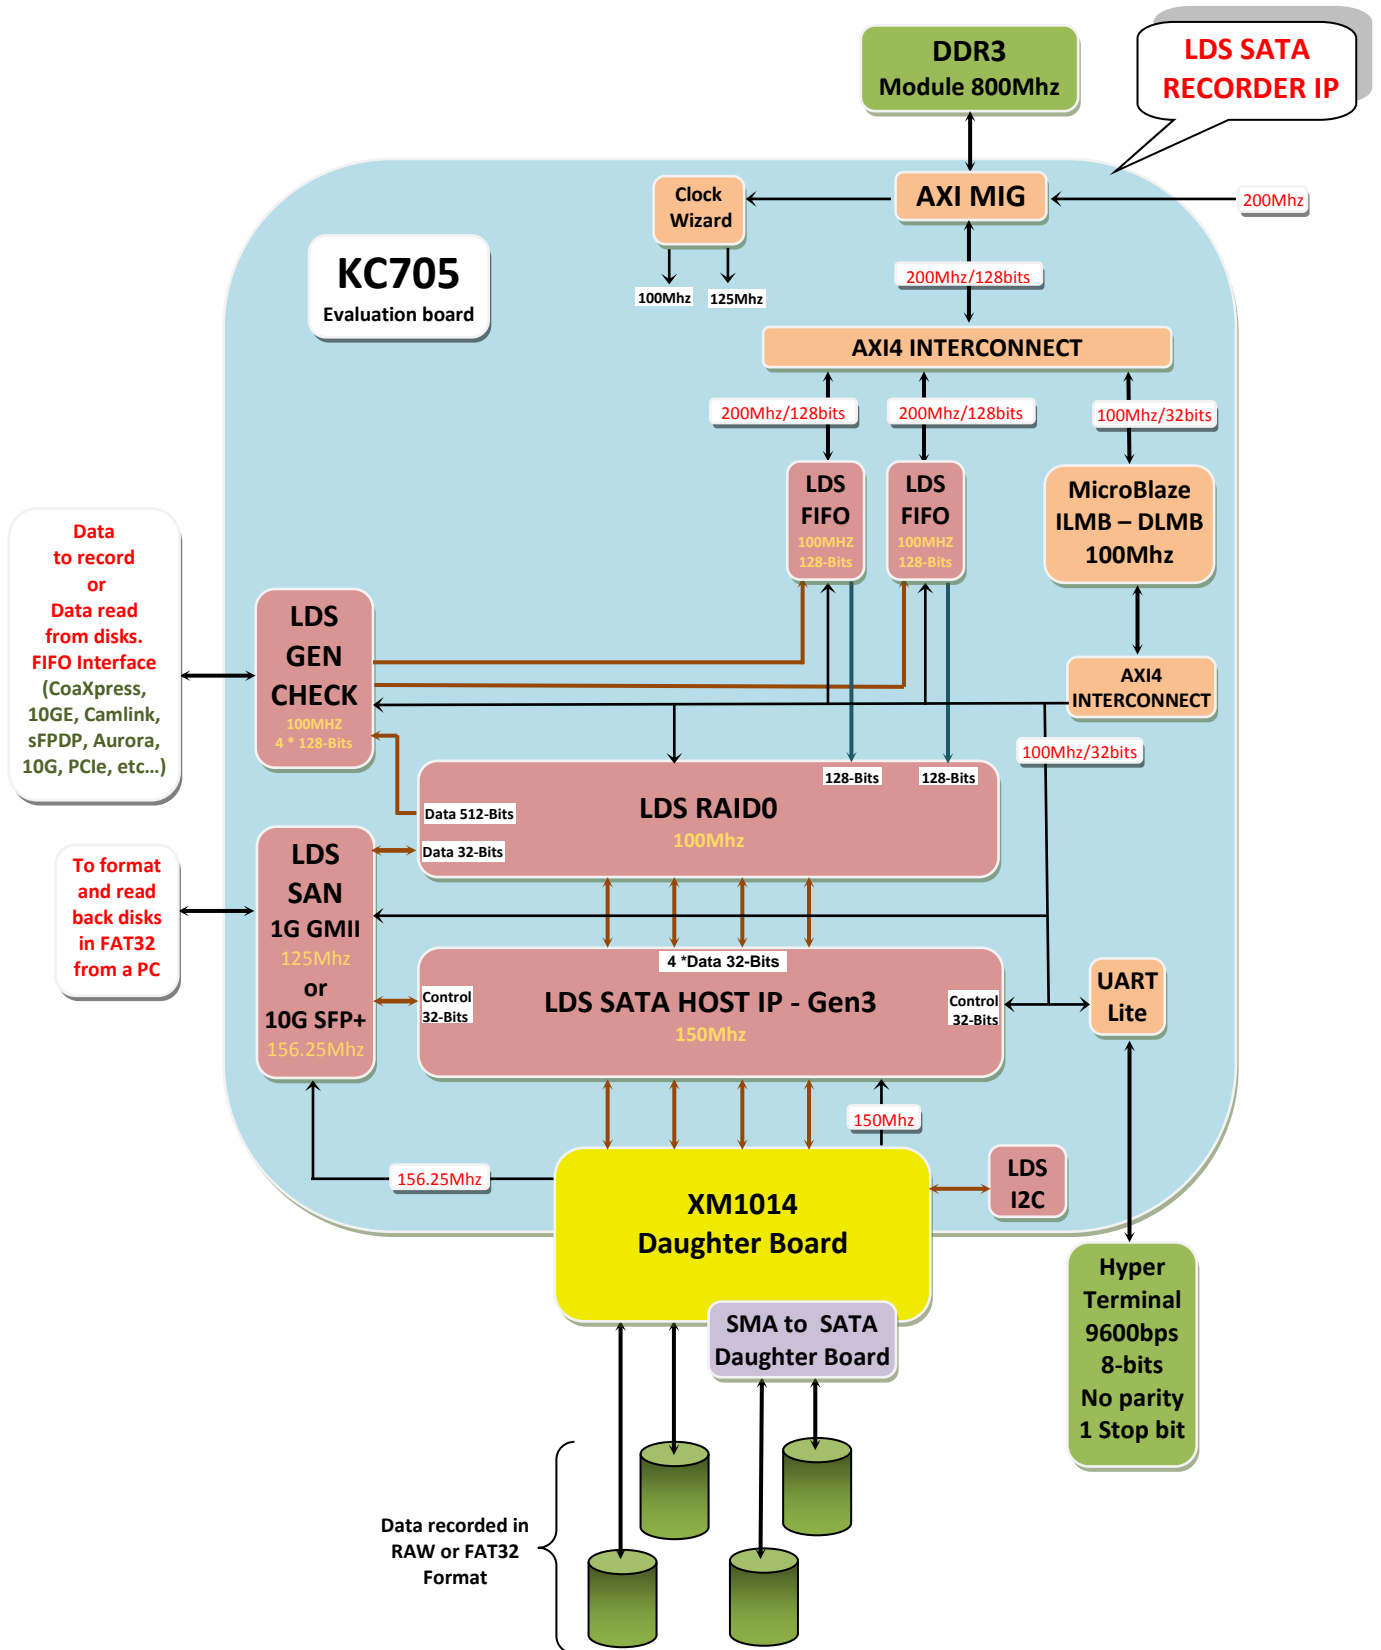

Performance

The demo provided on the Xilinx KC705 Evaluation board + XM104 daughter board undertakes a Disk Read and Write performance test on 2 disks in RAID0. A counter value is written on disks and then read back.

Recording performance :

- Two SAMSUNG 840 PRO 6Gbs :
 - o 80 GBytes transfer at 980MB/s sustain transfer in sequential write
 - o 80 GBytes transfer at 1050MB/s sustain transfer in sequential read
 - o Recorder configured with 8192 sectors per ATA command.

- Four SAMSUNG 840 PRO 6Gbs :
 - o Without DDR FIFO - 80 GBytes transfer at 1950MB/s sustain transfer in sequential write
 - o With DDR FIFO - 80 GBytes transfer at 1730MB/s sustain transfer in sequential write
 - o 80 GBytes transfer at 2100MB/s sustain transfer in sequential read
 - o Recorder configured with 8192 sectors per ATA command.

Ethernet performance :

- **1G SAN:**
 - o Read 100Mbyte/s
 - o Write 100Mbyte/s

- **10G SAN:**
 - o One disk Read : 350Mbyte/s
 - o Three disks Read in same time : 850Mbyte/s
 - o One disk Write : 310Mbyte/s
 - o Three disks Write in same time : 750Mbyte/s

Available Configuration

The Recorder IP is configurable according to user needs, the possible options are:

- o **FAT32** : if the user needs to read back recorded data on a PC or through Ethernet. Disks must be formatted before used with the recorder IP. If FAT32 is not needed, the data are recorded in RAW format by default.
- o **1G SAN:** if the user needs to read back recorded data through Ethernet. The Ethernet link enables to format disks. 100MBytes/s Ethernet bandwidth. Either 1G_SAN or 10G_SAN are selectable not both.
- o **10G SAN:** if the user needs to read back recorded data through Ethernet. The Ethernet link enables to format disks. Until 850MBytes/s Ethernet read bandwidth. Either 1G_SAN or 10G_SAN are selectable not both.
- o **MIG – LDS_FIFO:** if the user does not have a data buffer in its data path.
 - One MIG is usually coupled with 2 LDS_FIFO which enables to have a 256-bits data path at 200 MHz. In this case the DDR bandwidth available is enough to drive until four SSD.
 - In case of two MIGs, each MIG is connected to two LDS_FIFO which enabled to have a 512-bits data path at 200 MHz. In this case the DDR bandwidth available is enough to drive until eight SSD.
- o **RAID0:** if the user needs to increase recording performance. It manages one to eight SATA IP.
- o **SATA HOST:** One to eight SATA HOST IP to drive disks.
- o **MicroBlaze:** It manages the data flow and the User Interface through the UART. It enables to configure the recorder, to create directory, to create files, to read number of directory and files already written on disks, to read the available disks space, to read a sector of a disk, etc... and run the recording or the reading of disks. Please have a look on the Demo Data Sheet to have a complete list of the available menu.

Some example of configurations:

Configuration	Resources needed		Remarks
1 DDR_FIFO RAID0 - 1 SATA IP	FF: 35K LUT: 32K Memory LUT: 3.3K GT: 1	BRAM: 172 BUFG : 10 MMCM: 3 PLL: 1	None
1 DDR_FIFO RAID0 - 2 SATA IP	FF: 38K LUT: 36K Memory LUT: 3.5K GT: 2	BRAM: 184 BUFG : 10 MMCM: 3 PLL: 1	None
1 DDR_FIFO RAID0 - 4 SATA IP	FF: 46K LUT: 45K Memory LUT: 4K GT: 4	BRAM: 207 BUFG : 10 MMCM: 3 PLL: 1	Bandwidth limited by DDR FIFO
2 DDR_FIFO RAID0 - 4 SATA IP	FF: 47K LUT: 46K Memory LUT: 4K GT: 4	BRAM: 213 BUFG : 10 MMCM: 3 PLL: 1	None
1G SAN – FAT32 1 DDR_FIFO RAID0 - 1 SATA IP	FF: 40K LUT: 36K Memory LUT: 3.4K GT: 1	BRAM: 193 BUFG : 11 MMCM: 3 PLL: 1	None
1G SAN – FAT32 1 DDR_FIFO RAID0 - 2 SATA IP	FF: 43K LUT: 40K Memory LUT: 3.5K GT: 2	BRAM: 207 BUFG : 11 MMCM: 3 PLL: 1	None
1G SAN – FAT32 2 DDR_FIFO RAID0 - 4 SATA IP	FF: 53K LUT: 50K Memory LUT: 4K GT: 4	BRAM: 240 BUFG : 11 MMCM: 3 PLL: 1	None
1G SAN – FAT32 1 MIG - 2 LDS_FIFO RAID0 - 8 SATA IP	On request	On request	Bandwidth limited by DDR FIFO
10G SAN – FAT32 1 DDR_FIFO RAID0 - 1 SATA IP	FF: 42K LUT: 40K Memory LUT: 3.4K GT: 2	BRAM: 231 BUFG : 12 MMCM: 3 PLL: 1	
10G SAN – FAT32 1 DDR_FIFO RAID0 - 2 SATA IP	FF: 47K LUT: 46K Memory LUT: 3.6K GT: 3	BRAM: 261 BUFG : 12 MMCM: 3 PLL: 1	
10G SAN – FAT32 1 MIG - 2 LDS_FIFO RAID0 - 4 SATA IP	FF: 60K LUT: 58K Memory LUT: 4K GT: 5	BRAM: 327 BUFG : 12 MMCM: 3 PLL: 1	
10G SAN – FAT32 1 MIG - 2 LDS_FIFO RAID0 - 8 SATA IP	On request	On request	Bandwidth limited by DDR FIFO

Other configurations are possible according to user needs, please feel free to ask us.

General Description

The LDS_SATA_RECORDER_XK7 IP is a complete recording system IP. It can be configured according to the recording performance required and the quantity of the data to record. The LDS_SATA_RECORDER_XK7 IP is available only on Xilinx Kintex 7 T FPGA.

This IP can be customized according to specific needs (application-specific requirement). Any other pre-designed functions can be integrated into the FPGA. FPGA density and I/O requirements can be defined according to customer specification.

Recommended Design Experience

Designers should be familiar with Serial ATA, VHDL, synthesis tools, FPGA Place and Route data flow and VHDL simulation software. Experience with microprocessor is recommended. The IP can be easily integrated into hierarchical VHDL designs.

Available Support Products

Support products available from Logic Design Solutions.

Ordering Information

To purchase or make further inquiries about this, or any other Logic Design Solutions products and services, contact Logic Design Solutions in France.

Logic Design Solutions also offers IP integration and design services on FPGA.

Logic Design Solutions IPs are purchased under a License Agreement, copies of which are available on request.

Logic Design Solutions reserves the right to make changes to these specifications at any time, without notice.

All trademarks, registered trademarks, or service marks are the property of their respective owners.

Related Information

Logic Design Solutions

106 Boulevard de la Résistance
93460 Gournay sur Marne – France.

Phone : +33 (0) 1 45 92 24 47

E-mail : info@logic-design-solutions.com

WEB: <http://www.logic-design-solutions.com>